

**FOUR NEEDLES  
LOCKSTITCH**


**CONSEW**<sup>Since 1895</sup>

# MODEL 4214P

## Four Needle Lockstitch Machine with Puller Feed

*Featuring:*

- Parallel 4 row lockstitch seamer
- Fitted with puller feed for even feeding and sewing of heavy weight materials
- Long (38.1mm) maximum needle distance allows for greater flexibility
- Built-in Puller
- Front and rear needles are close together

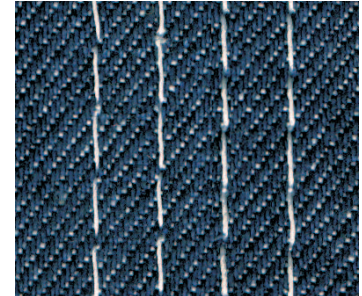

Four Needle Stitching



**HEAVY DUTY  
FOUR NEEDLE  
LOCKSTITCH MACHINE  
with PULLER FEEDER**

**Model 4214P**

**APPLICATIONS**

- The 4214P four needle lockstitch machine is capable of lockstitching in 4 rows simultaneously and most suitable for multiple seaming (reinforcing) areas of such garments as corset stripping, blanket binding, light weight tents and parachutes, etc. The 4214P is your most efficient machine for quickly and evenly reinforcing areas that require strength.
- The Puller feeder, for sewing heavy weight materials is very effective in achieving positive feeding of heavy and difficult materials. It gives you the ability to make uniform seams without a struggle.

**FEATURES**


- Sews four parallel rows of strong lockstitching
- Easily adjustable stitch length.
- Puller feed for heavy fabric.
- Wide range of available gauges enhances versatility.
- Large maximum needle distance - 38.1 mm

**SPECIFICATIONS**

Speed, Max. (S.P.M.)	2500 *
Stitch Length, Max.	7.1 s.p.i. (3.6mm)
Presser foot lift:	9.6 mm
Needle:	7 x 3 (DYx3)
Needle distances:	
Standard:	6.4 mm - 8 mm - 6.4 mm
Minimum:	6.4 mm
Max. distance between outer needles:	38.1 mm
Standard available gauges:	1/4"-1/4"-1/4", 1/4"-5/16"-1/4", 1/4"-3/8"-1/4"
* Speed depends on materials, operation and thread	



Puller Feeder

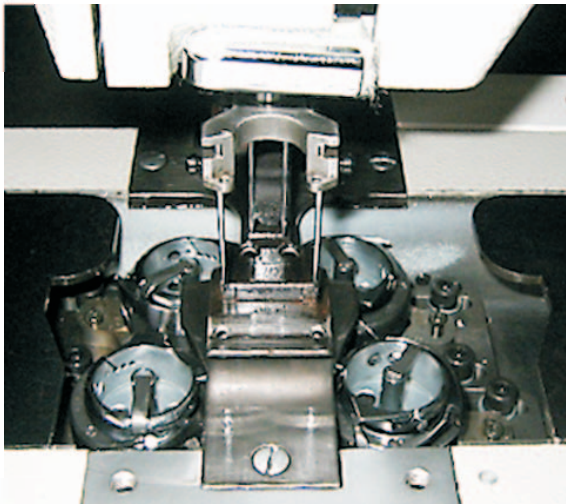

Four Horizontal Hooks and Bobbins

Adjustable gears allow use of any needle combination

