


QUILTING & EMBROIDERY

- With
- Automatic Needle Up/Down
- Front & Rear Adjustable Control Handles
- Adjustable Speed Control
- Laser Pointer for Tracking Patterns
- Top Handwheel
- 10' Steel Frame

Model 1709Q 17" LONG ARM
9" HEIGHT

Model 2611BQ 26" LONG ARM
11" HEIGHT
BIG BOBBIN

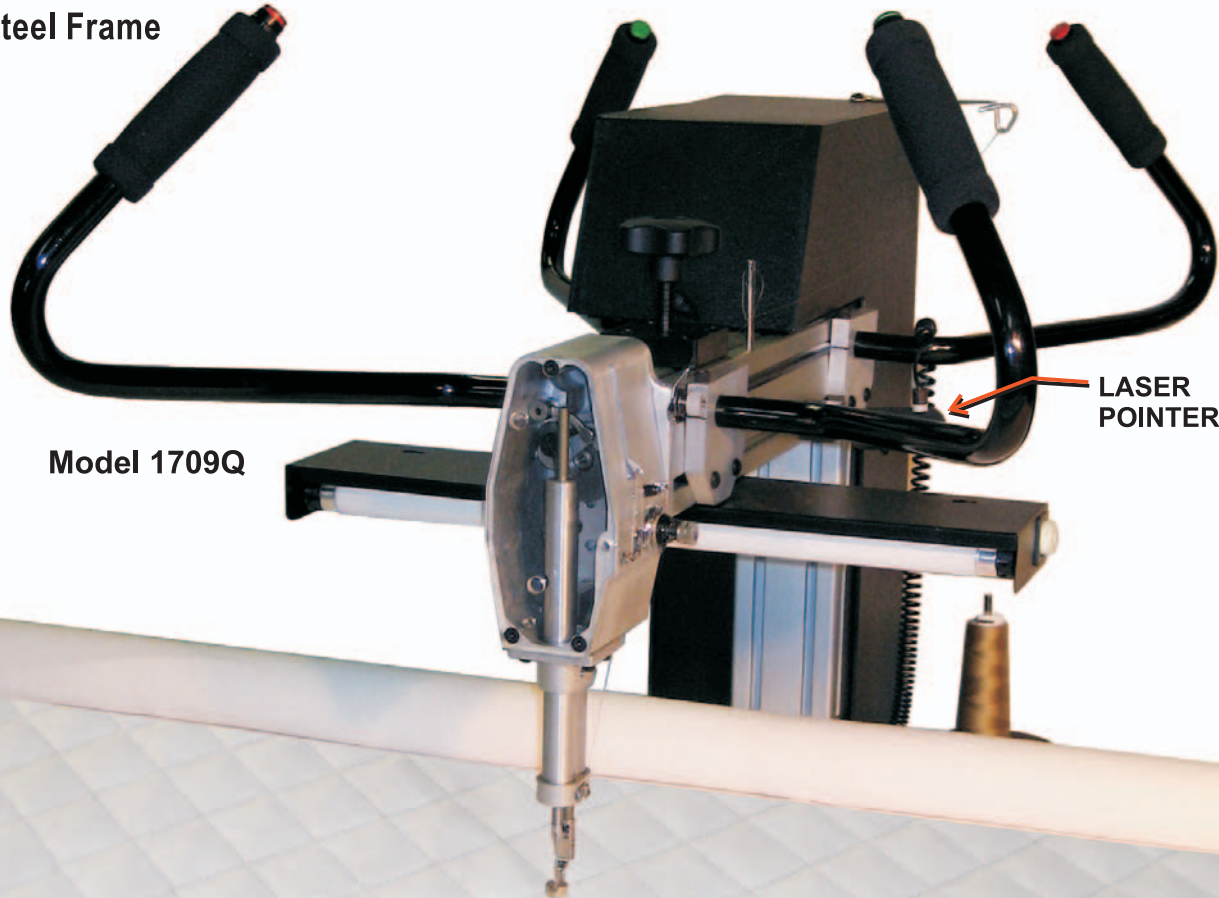

Model 1709Q

LASER POINTER



TOP HAND WHEEL

DRIVEN PRESSER FOOT

QUILTING MACHINE
LONG CYLINDER ARM (FREE ARM)
360° MOTION CONTROL
DRIVEN PRESSER FOOT
LOCKSTITCH MACHINE

Model 1709Q 17" LONG ARM, 9" HEIGHT
Model 2611QB 26" LONG ARM, 11" HEIGHT, BIG BOBBIN

APPLICATIONS

- Free arm quilting and embroidery of light and multilayer materials
- Especially suitable for long and complex materials.

FEATURES

- Light weight aluminum alloy construction.
- Miniature PLC easily adjusts the sewing speed and needle stop position.
- Front and rear adjustable control handles.
- Ten foot frame with dual rail easy roller system.
- Adjustable fabric ratcheting tensioners for multi-ply (3) applications.
- Detachable laser pointer for tracing pattern.
- Work table for small patterns.
- Built-in Florescent light.
- Nylon wheels with sealed steel bearings.
- 1-1/2" 11ga steel poles for less bowing.
- Rotary thread tensioner.
- Oilless needle and presser bar for no oil drips.
- Synchronous belt drive to top and bottom shaft.
- Harmonic balancers on top shaft.
- Top mounted non-engaged hand wheel.
- "L" bobbin case and belt driven Koban hook assembly (Model 1709Q)
("M" size bobbin in the 2611BQ)
- Rear mounted thread stand.
- Includes light frame for mounting overhead light (light not included)

SPECIFICATIONS

Motor	5/8 hp 4-pole brush DC
Speed	0-3000 spm * Speed depends on operation, materials and thread
Frame	10 foot 1-1/2 in. 14 ga. steel square tubing
Capacity	1709Q: 17 in. depth x 9 in. height 2611BQ: 26 in. depth x 11 in. height
Voltage	115vac
Shipping Data	Frame 290 lbs / 10'6" length x 13" width x 10" height Machine 85lbs / 34" length x 26" width x 28" height

Specifications subject to change without notice.

©2007 Consew USA -107