


Since 1898  
**CONSEW**®

# Model 366-30

## LONG ARM ZIG-ZAG MACHINE

With

- LARGE TRANSVERSE SHUTTLE HOOK AND BOBBIN
- BOBBIN WINDER ON TOP OF MACHINE HEAD
- PRESSER FOOT LIFT UP TO 20 MM
- UP TO 12 MM ZIG-ZAG

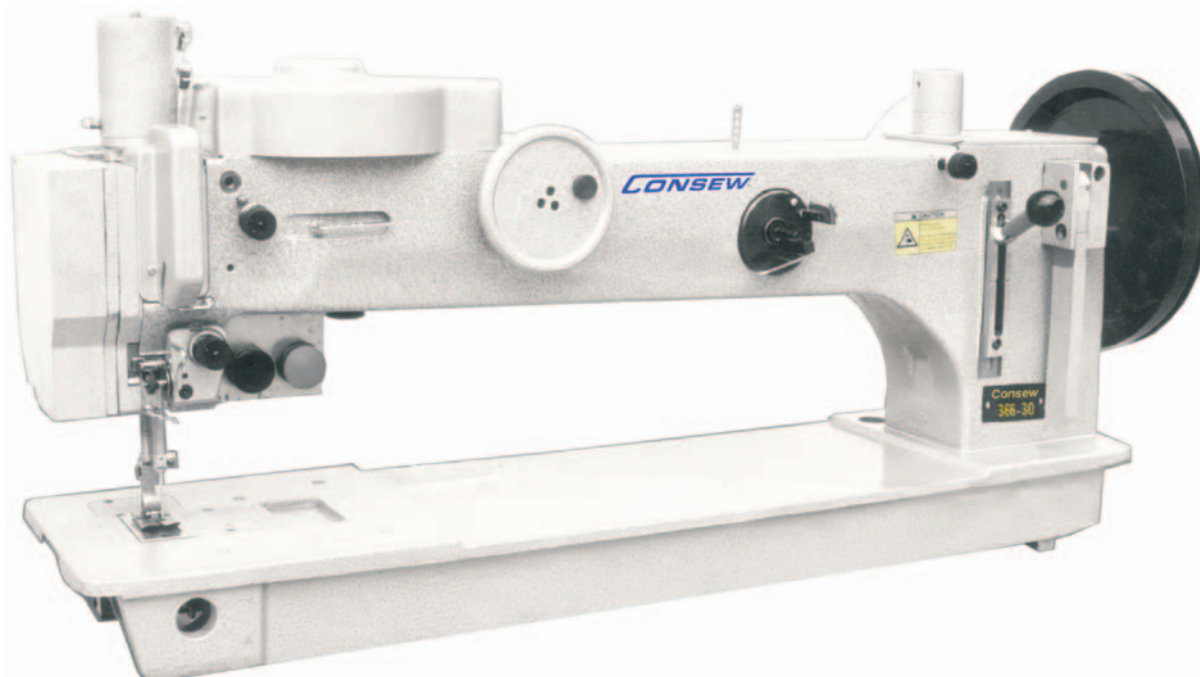

## HEAVY DUTY, SINGLE NEEDLE STRAIGHT STITCH and **ZIG-ZAG** LONG-ARM MACHINE

### APPLICATIONS

• Great for sewing various kinds of leather, synthetic, vinyl, canvas and working on large pieces. The zig-zag operation is particularly suited for the production of sails, tents, tarpaulins & leather goods

### SPECIFICATIONS

Max. sewing speed	600 r.p.rn *
Max. stitch length	10 mm
Zigzag stitch width	0-12 mm
Needle bar stroke	50.8 mm
Thread take-up stroke	96 mm
Presser Foot	By hand 13 mm
Lift Height	By knee 20 mm
Needle size	DY x 3 25#
Shuttle hook	KSP-204N
Lubrication	Manual
Working space	760 x 175 mm
Motor	750W Clutch motor

\* Speed depends on materials, thread and operation.

### FEATURES

- Straight Stitch up to 10mm stitch length
- Zig-Zag: 1-step, 2-step & 3-step operation
- Control cams for 1-step and 3-step zig-zag included
- Fast conversion to different stitches and needle sizes  
*Stitch control cams, hook, bobbin and shuttle race can be easily accessed by loosening a knurled nut*
- Large transverse shuttle hook and bobbin
- Bobbin winder on top of machine head
- Presser foot lift up to 20 mm
- Large handwheel for increased sew-through capability
- Coordinated foot pressure and foot lift for easy control
- Push-button control for intermittent tacking and ½ stitch needle adjustment
- Permanently lubricated roller bearings for long life
- Needle guard and bar designed for sewing safety when using very thick threads
- Optional top and bottom puller feed available.